

HINO

300 Series

Tipper Range



*Image may contain items not standard to the model

KEY FEATURES

Factory Tipper bodies with drop sides
 STD Cab, Wide and Crew Cab variants
 Pre-Collision System (PCS) including AEB & PD
 Vehicle Stability Control (VSC) including ABS & TC
 Lane Departure Warning System (LDWS)
 Daytime Running Lamps (DRL)
 Dual SRS Airbags
 Reverse Camera
 ECE R-29 Cab Strength Certified
 Cruise Control
 ADR 80/03 Emission level using Euro 5 Standard


KEY SPECIFICATIONS

GVM. 4,495 to 8,500 kg
GCM. GVM + 3,500kg
 Automatic up to 8,000kg
Power range 150hp to 165hp
Torque range 420Nm to 464Nm
Transmissions . STD cab . . 5 spd Manual & 6 spd Automatic
 Wide cab . . 6 spd Manual & 6 spd Automatic
Wheelbases2.5m to 4.2m*
Internal body length3.0m to 4.0m*

*See Model details for exact dimensions

MODEL DETAILS

Model Description		616 AT 2525 STD TIPPER	616 MT 2525 STD TIPPER	616 AT 2810 WIDE TIPPER	617 MT 2810 WIDE TIPPER	716 AT 3430 WIDE TIPPER	717 MT 3430 WIDE TIPPER	917 MT 3430 WIDE TIPPER	717 MT 4200 WIDE CREW TIPPER	816 AT 4200 WIDE CREW TIPPER	917 MT 4200 WIDE CREW TIPPER
Product Code		XZU605R-WKTMSQ3 T	XZU605R-WKMMSQ3 T	XZU700R-WKTMSQ3 T	XZU700R-WKFMTQ3 T	XZU710R-WKTQSQ3 T	XZU710R-WKFQTQ3 T	XZU710R-WKFTTQ3 T	XZU730R-ZKFQTQ3 T	XZU730R-ZKTSSQ3 T	XZU730R-ZKFTTQ3 T
TIPPER BODY											
Cubic Capacity		1.9m³		2.1m³		3.0m³		3.2m³		3.4m³	
Internal length (mm)		3,000		3,100		3,600		3,800		4,000	
Internal width (mm)		1,750		1,900		2,000		2,000			
Drop sides & tailgate height (mm)		370		370		430		430			
Deck plate thickness (mm)		3.2		3.2			4.5		3.2		4.5
Front plate thickness (mm)		3.2		3.2		2.3		3.2		2.3	
Drop sides & Tailgate thinckness (mm)		2.3		2.3			3.2		3.2		
Tipping angle (deg)		60°		60°		55°		50°			
Hydraulic cylinder bore & stroke (mm)		100 x 350		100 x 350		100 x 480		100 x 510			
Hydraulic pump model		VC02-04	VC02-03	VC02-06		VC03-15		VC03-15			
Control		Lever in the cab		Lever in the cab					Leaver in the cab		
Tailgate operation		Hinged from top and bottom, auto release from bottom		Hinged from top and bottom, auto release from bottom					2 way gates hinged from the top and sides, auto release from the bottom		
VEHICLE DETAILS											
Engine speed @ 100 Km/h		2,230rpm	2,500rpm	2, 165rpm	2,128rpm	2,246rpm	2,213rpm	2,458rpm	2,213rpm	2,525rpm	2,458rpm
Max theoretical speed		139km/h	124km/h	143km/h	145km/h	138km/h	140km/h	126km/h	140km/h	122km/h	126km/h
Engine Power & Torque (hp & Nm)		150hp/420Nm		150hp/420Nm	165hp/464Nm	150hp/420Nm	165hp/464Nm		165hp/464Nm	150hp/420Nm	165hp/464Nm
Transmission type & number of forward gears		Automatic 6 speed	Manual 5 speed	Automatic 6 speed	Manual 6 speed	Automatic 6 speed	Manual 6 speed		Manual 6 speed	Automatic 6 speed	Manual 6 speed
Fuel Tank Capacity		80 L		100 L		150 L		100 L			
Wheels & Tyres		185/85R16		195/85R16		215/85R16		225/80R17.5	215/85/R16	225/80R17.5	
Seating capacity		3		3					7		
DIMENSIONS – (mm)/WEIGHTS – (kg)											
Wheelbase (WB)		2,525		2,810		3,430		4,200			
Overall length (OL)		4,760		5,115		5,870		6,975		7,025	
Overall width (OW)		1,880		1,995		2,130		2,190			
Cab width		1,695		1,995					1,995		
Overall height (OH)		2,100		2,190		2,230		2,230		2,250	2,260
Front Overhang (FOH)		980		1,115					1,115		
Road Clearance (RC)		170		170		185		200	180	200	
Front Track (FT)		1,400		1,665		1,665			1,655		
Rear Track (RT)		1,435		1,480		1,520		1,590	1,520	1,590	
Turning circle	Kerb to Kerb	9,600		9,800		11,400		12,400	13,800	14,800	
	Wall to Wall	10,800		11,200		12,800		13,800	15,200	16,200	
Indicative chassis mass–kg (STD tools, 10 litres of fuel, spare tyre & subject to a +/- 3% tolerance)											
Total		2,795	2,755	3,100	3,070	3,555	3,520	3,705	3,815	3,915	4,030
Front		1,520	1,495	1,765	1,745	1,915	1,890	1,905	1,995	2,020	1,980
Rear		1,275	1,260	1,335	1,325	1,640	1,630	1,800	1,820	1,895	2,050
Standard Ratings	GVM	4,495kg		4,495kg		6,500kg		7,995kg	6,500kg	8,000kg	7,995kg
	GCM	7,995kg		7,995kg		8,000kg	10,000kg	11,495kg	10,000kg	8,000kg	11,495kg
Optional Ratings	GVM	5,500kg		5,500kg		4,495kg		8,500kg	4,495kg		8,500kg
	GCM	8,000kg	9,000kg	8,000kg	9,000kg	7,995kg		12,000kg	7,995kg		12,000kg

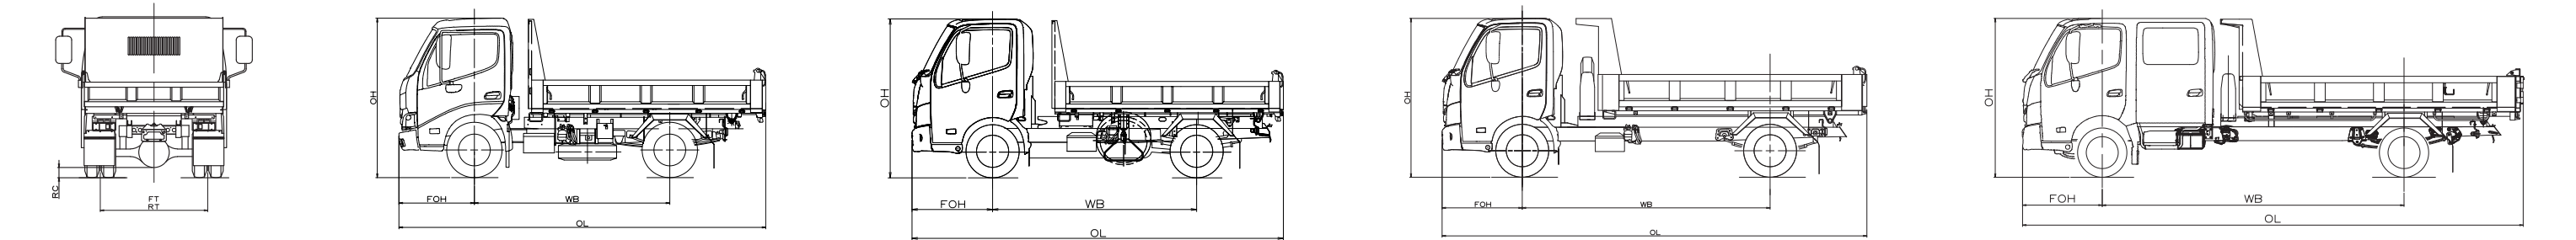

Drawings are for reference only to the dimensions table above.

For specific layouts please refer to the applicable body mounting manual. (BMM)

SAFETY FEATURES

Active Safety Features		
Vehicle Stability Control	VSC	Equipped
Anti-lock Brake System	ABS	Equipped
Pre-Collision System	PCS	Equipped
PCS is inclusive of	Autonomous Emergency Braking	AEB
	Pedestrian Detection	PD
Traction Control	TC	Equipped
Lane Departure Warning System	LDWS	Equipped
Reverse Camera	RC	Equipped
Easy and Smooth Start	ES	Equipped (MT models only)
Daytime Running Lamps	DRL	Equipped
Reverse Buzzer		Equipped
Passive Safety Features		
ECE-R29 Cab Strength Certification		Equipped
SRS airbags for driver & side passenger		Equipped
SRS seatbelt pretensioner for driver & side passenger		Equipped
Shock absorbing & collapsible steering column		Equipped
Door Impact Beams		Equipped

TIPPER BODY FEATURES

All steel construction with underbody hoist
Auto release tail gate
Drop sides & tail gate
Body lock, rope rails & side hinged tail gates (Crew cab models)

GENUINE ACCESSORY OPTIONS

Bullbar or Nudge bar
Chrome wheel covers
Cameras (up to additional 3 extra)
Dash mat
Floor mats
Truck spec GPS navigation with live traffic
Seat covers (Wool, Canvas, Carbon)
Stone guard
Weathershields
Retracting Tarp
Please check with your dealer for availability, price & fitment

For Cab Chassis related specifications not included in this document please refer to the applicable Cab Chassis spec sheet or Body mounting Manual

WARRANTY

New vehicle warranty period

Light Duty Model	Axle configuration	Standard warranty (whichever comes first)	Cab corrosion perforation
300 Series	4 x 2	3 years or 100,000km	36 months

Battery warranty – 12 months from date of delivery

Genuine parts or accessories warranty – 3 years unlimited kilometres when fitted by an authorised Hino dealer *

* For conditions, refer to the Hino Parts & Service warranty brochure



DISCLAIMER

Important notice – Hino Trucks are distributed in Australia by Hino Motor Sales Australia Pty Ltd A C N 064 989 724. All efforts have been made to ensure the information contained in this brochure was correct at time of printing or uploading. Hino Motor Sales Australia Pty Ltd reserves the right to alter any details of the specifications and equipment without notice. Hino in so far as it is permitted by law to do so, shall not be liable in any way as a result of any reliance placed by any person on anything contained in this brochure. You should therefore check with your authorised Hino dealer at the time of ordering your motor vehicle to ensure that colour, specifications, equipment, design features and options are available for the vehicle you are ordering. Please note that some options may only be available in combination with others. Authorised Hino dealers will on request provide up to date information on all accessories, design features, prices & availability.