

HITACHI

DASH 3



ZAXIS 200-3 / ZAXIS 200LC-3

- Engine Net Power: 159 hp (118 kW) @ 2,000 rpm
- Operating Weight: 47,015 lb. (21 326 kg)
- Backhoe Bucket: 1.19 yd³ (0.91 m³)

Engine

Manufacturer and Model	Isuzu AH-4HK1XYSA-01 certified to EPA Tier-3 emissions
Net Power (ISO9249)	159 hp (118 kW) @ 2,000 rpm
Cylinders	4
Displacement	317 cu. in. (5.193 L)
Aspiration	turbocharged, air-to-air charge air cooler
Off-Level Capacity	70% (35 deg.)

Cooling

Direct-drive suction-type fan

Powertrain

Maximum Travel Speed

Low	2.2 mph (3.5 km/h)
High	3.4 mph (5.5 km/h)

Hydraulics

Open center, load sensing; auxiliary hydraulic flow adjustable through monitor

Main Pumps 2 variable-displacement axial-piston pumps

Maximum Rated Flow 2 x 56 gpm (2 x 212 L/m)

Pilot Pump one gear

Maximum Rated Flow 7.9 gpm (30 L/m)

Pressure Setting 580 psi (3999 kPa)

System Operating Pressure

Implement Circuits..... 4,980 psi (34 336 kPa)

Travel Circuits 4,980 psi (34 336 kPa)

Swing Circuits 4,980 psi (34 336 kPa)

Power Boost 5,270 psi (36 335 kPa)

Controls pilot levers, short stroke, low effort; hydraulic pilot controls with shutoff lever

Cylinders

Heat-treated, chrome-plated, polished cylinder rods; hardened-steel (replaceable bushings) pivot pins

	Bore	Rod Diameter	Stroke
Boom (2)	4.72 in. (120 mm)	3.35 in. (85 mm)	49.61 in. (1260 mm)
Arm (1).....	5.31 in. (135 mm)	3.74 in. (95 mm)	58.07 in. (1475 mm)
Bucket (1)	4.53 in. (115 mm)	3.15 in. (80 mm)	41.73 in. (1060 mm)

Electrical

Batteries 2 x 12 volt

Alternator Rating 50 amp

Work Lights..... 2 halogen (one mounted on boom, one mounted on frame)

Undercarriage

	<i>200-3</i>	<i>200LC-3</i>
Planetary final drives with axial-piston motors		
Carrier Rollers (per side).....	2	2
Track Rollers (per side).....	7	8
Shoes (per side)	46	49
Drawbar Pull	45,620 lb. (20 711 kg)	45,620 lb. (20 711 kg)
Track		
Adjustment.....	hydraulic	hydraulic
Guides.....	center	center
Chain.....	sealed and lubricated	sealed and lubricated

Swing Mechanism

Swing Speed.....	13.3 rpm
Swing Torque.....	50,662 lb.-ft. (68 900 Nm)

Ground Pressure

	200-3	200LC-3
Triple Semi-Grouser Shoes		
24 in. (600 mm).....	6.5 psi (45 kPa)	6.09 psi (42 kPa)
28 in. (700 mm).....	5.8 psi (40 kPa)	5.37 psi (37 kPa)
32 in. (800 mm).....	5.07 psi (35 kPa)	5.29 psi (36.5 kPa)

Serviceability

Refill Capacities

Fuel Tank.....	106 gal. (400 L)
Cooling System.....	27.6 qt. (26.1 L)
Engine Oil with Filter.....	24 qt. (23 L)
Hydraulic Tank.....	36 gal. (135 L)
Hydraulic System.....	63.4 gal. (240 L)

Gearbox


Propel (each).....	7.2 qt. (6.8 L)
Swing.....	7 qt. (6.2 L)
Pump Drive.....	1.1 qt. (1 L)

Operating Weights

	200-3	200LC-3
With Full Fuel Tank; 175-lb. (79 kg) Operator; 42-in. (1065 mm), 1.19-cu.-yd. (0.91 m ³), 1,951-lb. (886 kg) Heavy-Duty Bucket; 9-ft. 7-in. (2.91 m) Arm; 10,463-lb. (4750 kg) Counterweight; and 32-in. (800 mm) Triple Semi-Grouser Shoes.....	45,692 lb. (20 726 kg)	47,015 lb. (21 326 kg)
Optional Components		
Undercarriage with Triple Semi-Grouser Shoes		
24 in. (600 mm).....	14,873 lb. (6752 kg)	16,196 lb. (7353 kg)
28 in. (700 mm).....	15,733 lb. (7143 kg)	17,056 lb. (7743 kg)
32 in. (800 mm).....	16,381 lb. (7437 kg)	17,704 lb. (8038 kg)
One-Piece Boom (with arm cylinder).....	3,815 lb. (1732 kg)	3,815 lb. (1732 kg)
Arm with Bucket Cylinder and Linkage		
7 ft. 11 in. (2.42 m).....	2,044 lb. (928 kg)	2,044 lb. (928 kg)
9 ft. 7 in. (2.91 m).....	2,181 lb. (990 kg)	2,181 lb. (990 kg)
Boom Lift Cylinders (2) Total Weight.....	750 lb. (341 kg)	750 lb. (341 kg)
42-in. (1065 mm), 1.19-cu.-yd. (0.91 m ³) Heavy- Duty Bucket.....	1,951 lb. (886 kg)	1,951 lb. (886 kg)
Counterweight (standard).....	10,463 lb. (4750 kg)	10,463 lb. (4750 kg)


Operating Dimensions

	200-3		200LC-3	
	Arm Length	Arm Length	Arm Length	Arm Length
	7 ft. 11 in. (2.42 m)	9 ft. 7 in. (2.91 m)	7 ft. 11 in. (2.42 m)	9 ft. 7 in. (2.91 m)
Arm Force with 42-in. (1065 mm) Heavy-Duty Bucket with Power Boost.....	27,877 lb. (124 kN)	22,924 lb. (102 kN)	27,877 lb. (124 kN)	22,924 lb. (102 kN)
Bucket Digging Force with 42-in. (1065 mm) 1.19-cu.-yd. (0.91 m ³) Heavy-Duty Bucket with Power Boost.....	29,099 lb. (129.4 kN)	29,099 lb. (129.4 kN)	29,099 lb. (129.4 kN)	29,099 lb. (129.4 kN)
Lifting Capacity Over Front at Ground Level				
20-ft. (6.1 m) Reach with Power Boost	14,607 lb. (6632 kg)	13,223 lb. (6003 kg)	14,533 lb. (6598 kg)	14,248 lb. (6469 kg)
A Maximum Reach.....	30 ft. 11 in. (9.43 m)	32 ft. 7 in. (9.92 m)	30 ft. 11 in. (9.43 m)	32 ft. 7 in. (9.92 m)
A' Maximum Reach at Ground Level	30 ft. 4 in. (9.25 m)	32 ft. (9.75 m)	30 ft. 4 in. (9.25 m)	32 ft. (9.75 m)
B Maximum Digging Depth	20 ft. 3 in. (6.18 m)	21 ft. 11 in. (6.68 m)	20 ft. 3 in. (6.18 m)	21 ft. 11 in. (6.68 m)
B' Maximum Digging Depth at 8-ft. (2.44 m) Flat Bottom.....	19 ft. 6 in. (5.95 m)	21 ft. 4 in. (6.50 m)	19 ft. 6 in. (5.95 m)	21 ft. 4 in. (6.50 m)
C Maximum Cutting Height	31 ft. 9 in. (9.67 m)	32 ft. 11 in. (10.04 m)	31 ft. 9 in. (9.67 m)	32 ft. 11 in. (10.04 m)
D Maximum Dumping Height	22 ft. 5 in. (6.83 m)	23 ft. 7 in. (7.18 m)	22 ft. 5 in. (6.83 m)	23 ft. 7 in. (7.18 m)
E Minimum Swing Radius	10 ft. 9 in. (3.28 m)	10 ft. 5 in. (3.18 m)	10 ft. 9 in. (3.28 m)	10 ft. 5 in. (3.18 m)
F Maximum Vertical Wall	17 ft. 5 in. (5.30 m)	19 ft. 8 in. (5.99 m)	17 ft. 5 in. (5.30 m)	19 ft. 8 in. (5.99 m)
G Tail Swing Radius.....	9 ft. (2.75 m)	9 ft. (2.75 m)	9 ft. (2.75 m)	9 ft. (2.75 m)

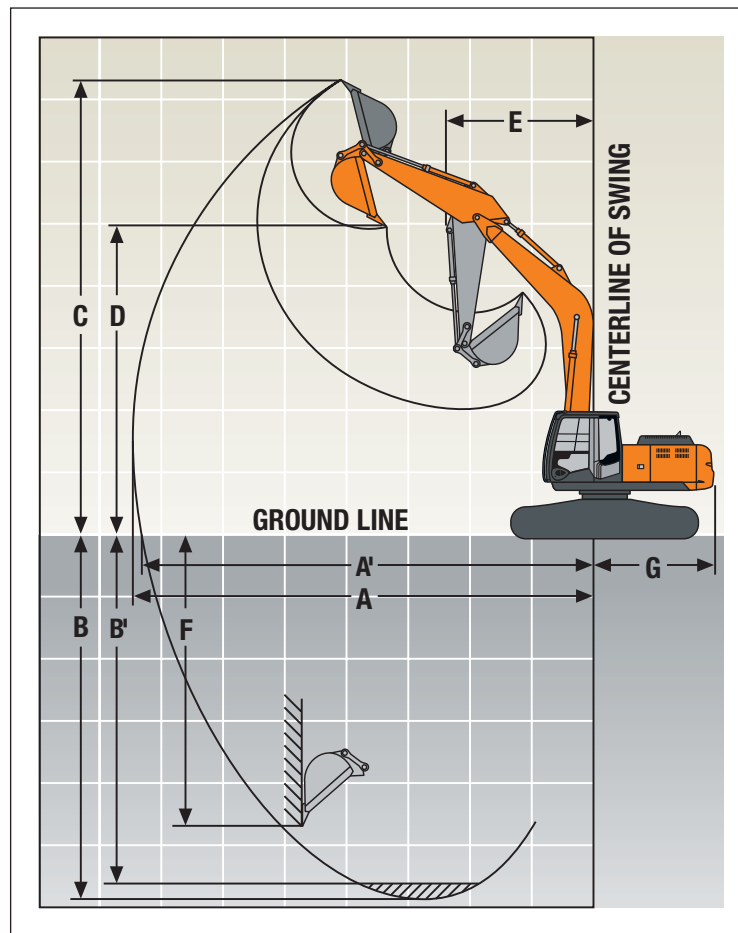

Machine Dimensions

	200-3		200LC-3	
	Arm Length		Arm Length	
A Overall Length	7 ft. 11 in. (2.42 m)	9 ft. 7 in. (2.91 m)	7 ft. 11 in. (2.42 m)	9 ft. 7 in. (2.91 m)
B Overall Height	31 ft. 6 in. (9.60 m)	31 ft. 3 in. (9.53 m)	31 ft. 6 in. (9.60 m)	31 ft. 3 in. (9.53 m)
C Rear-End Length/Swing Radius	10 ft. 5 in. (3.18 m)	9 ft. 8 in. (2.95 m)	10 ft. 5 in. (3.18 m)	9 ft. 8 in. (2.95 m)
D Distance Between Idler/Sprocket Centerline.....	9 ft. (2.75 m)	9 ft. (2.75 m)	9 ft. (2.75 m)	9 ft. (2.75 m)
E Undercarriage Length	11 ft. (3.35 m)	11 ft. (3.35 m)	12 ft. (3.67 m)	12 ft. (3.67 m)
F Counterweight Clearance.....	13 ft. 8 in. (4.17 m)	13 ft. 8 in. (4.17 m)	14 ft. 8 in. (4.46 m)	14 ft. 8 in. (4.46 m)
G Counterweight Clearance.....	3 ft. 5 in. (1031 mm)	3 ft. 5 in. (1031 mm)	3 ft. 5 in. (1031 mm)	3 ft. 5 in. (1031 mm)
H Upperstructure Width.....	8 ft. 11 in. (2.71 m)	8 ft. 11 in. (2.71 m)	8 ft. 11 in. (2.71 m)	8 ft. 11 in. (2.71 m)
I Cab Height.....	9 ft. 8 in. (2.95 m)	9 ft. 8 in. (2.95 m)	9 ft. 8 in. (2.95 m)	9 ft. 8 in. (2.95 m)
J Track Width with Triple Semi-Grouser Shoes ...	24 in. (600 mm)	24 in. (600 mm)	24 in. (600 mm)	24 in. (600 mm)
	28 in. (700 mm)	28 in. (700 mm)	28 in. (700 mm)	28 in. (700 mm)
	32 in. (800 mm)	32 in. (800 mm)	32 in. (800 mm)	32 in. (800 mm)
K Gauge Width.....	7 ft. 10 in. (2.39 m)	7 ft. 10 in. (2.39 m)	7 ft. 10 in. (2.39 m)	7 ft. 10 in. (2.39 m)
L Ground Clearance	18 in. (450 mm)	18 in. (450 mm)	18 in. (450 mm)	18 in. (450 mm)
L Overall Width with Triple Semi-Grouser Shoes				
24 in. (600 mm).....	9 ft. 10 in. (2.99 m)	9 ft. 10 in. (2.99 m)	9 ft. 10 in. (2.99 m)	9 ft. 10 in. (2.99 m)
28 in. (700 mm).....	10 ft. 2 in. (3.09 m)	10 ft. 2 in. (3.09 m)	10 ft. 2 in. (3.09 m)	10 ft. 2 in. (3.09 m)
32 in. (800 mm).....	10 ft. 6 in. (3.19 m)	10 ft. 6 in. (3.19 m)	10 ft. 6 in. (3.19 m)	10 ft. 6 in. (3.19 m)

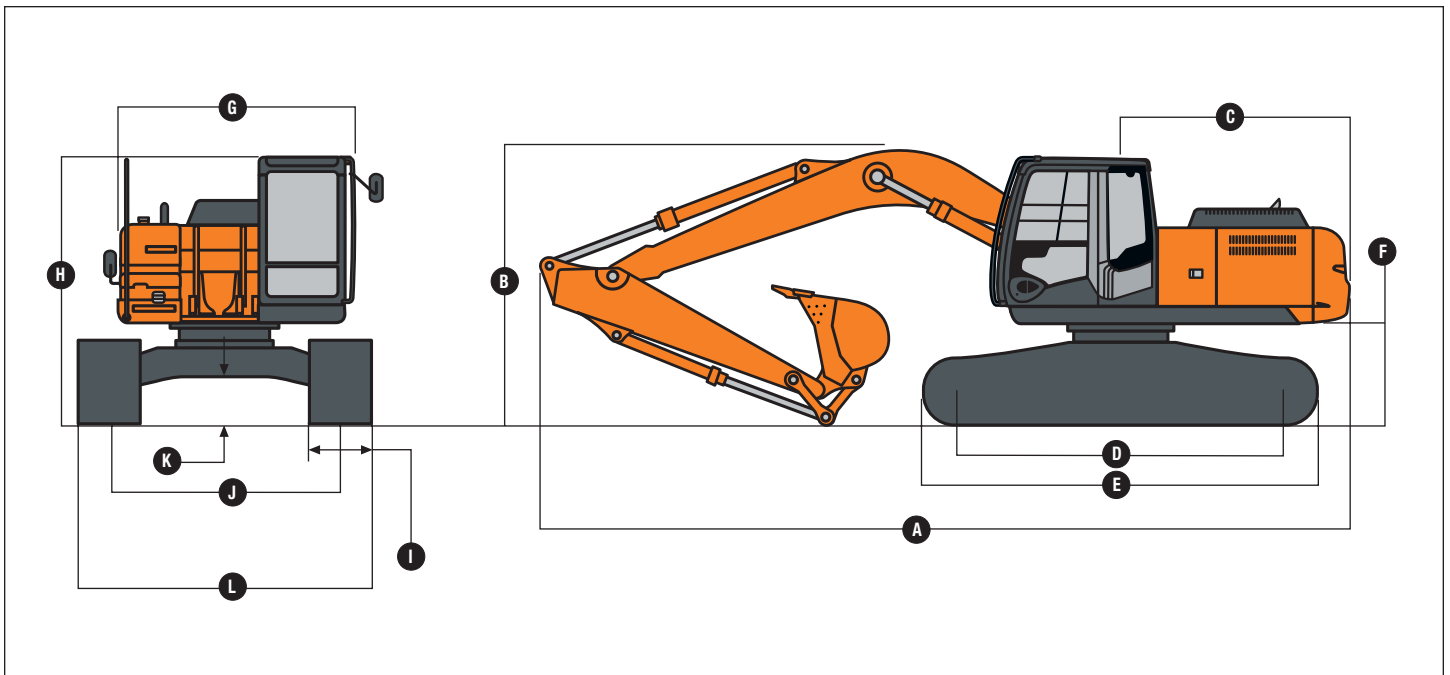

ZAXIS 200-3 / ZAXIS 200LC-3 SPECIFICATIONS

Lift Charts

Boldface italic type indicates hydraulic-limited capacities; lightface type indicates stability-limited capacities, in lb. (kg). Ratings are at bucket lift hook, using 1.12-cu.-yd. (0.86 m³) bucket; standard counterweight, situated on firm, level, uniform supporting surface. Figures do not exceed 87 percent of hydraulic capacity or 75 percent of weight needed to tip machine.


Load Point Height	10 ft. (3.05 m)		15 ft. (4.57 m)		20 ft. (6.10 m)		25 ft. (7.62 m)	
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
<i>200-3 with 9-ft. 7-in. (2.91 m) arm and 28-in. (700 mm) triple semi-grouser shoes</i>								
20 ft. (6.10 m)					8,048 (3651)	8,048 (3651)		
15 ft. (4.57 m)					8,970 (4069)	8,970 (4069)	8,574 (3889)	6,523 (2959)
10 ft. (3.05 m)			13,847 (6281)	13,847 (6281)	10,757 (4879)	9,161 (4155)	9,329 (4232)	6,290 (2853)
5 ft. (1.52 m)			18,108 (8214)	13,135 (5958)	12,766 (5791)	8,578 (3891)	9,515 (4316)	6,004 (2723)
Ground Line			20,308 (9212)	12,435 (5640)	13,103 (5943)	8,139 (3692)	9,255 (4198)	5,765 (2615)
-5 ft. (-1.52 m)	14,425 (6543)	14,425 (6543)	20,412 (9259)	12,245 (5554)	12,866 (5836)	7,925 (3595)	9,120 (4137)	5,641 (2559)
-10 ft. (-3.05 m)	23,940 (10 859)	23,940 (10 859)	18,971 (8605)	12,337 (5596)	12,873 (5839)	7,931 (3597)	9,183 (4165)	5,699 (2585)
-15 ft. (-4.57 m)	20,943 (9500)	20,943 (9500)	5,628 (7089)	12,683 (5753)	11,249 (5102)	8,204 (3721)		
<i>200-3 with 9-ft. 7-in. (2.91 m) arm and 32-in. (800 mm) triple semi-grouser shoes</i>								
20 ft. (6.10 m)					8,048 (3651)	8,048 (3651)		
15 ft. (4.57 m)					8,970 (4069)	8,970 (4069)	8,574 (3889)	6,581 (2985)
10 ft. (3.05 m)			13,847 (6281)	13,847 (6281)	10,757 (4879)	9,237 (4190)	9,329 (4232)	6,348 (2879)
5 ft. (1.52 m)			18,108 (8214)	13,244 (6007)	12,766 (5791)	8,653 (3925)	9,603 (4356)	6,062 (2750)
Ground Line			20,308 (9212)	12,545 (5690)	13,223 (5998)	8,214 (3726)	9,344 (4238)	5,822 (2641)
-5 ft. (-1.52 m)	14,425 (6543)	14,425 (6543)	20,412 (9259)	12,354 (5604)	12,985 (5890)	8,001 (3629)	9,209 (4177)	5,698 (2585)
-10 ft. (-3.05 m)	23,940 (10 859)	23,940 (10 859)	18,971 (8605)	12,446 (5645)	12,992 (5893)	8,007 (3632)	9,272 (4206)	5,756 (2611)
-15 ft. (-4.57 m)	20,943 (9500)	20,943 (9500)	15,628 (7089)	12,792 (5802)	11,249 (5102)	8,279 (3755)		
<i>200LC-3 with 7-ft. 11-in. (2.42 m) arm and 32-in. (800 mm) triple semi-grouser shoes</i>								
20 ft. (6.10 m)					9,001 (4083)	9,001 (4083)		
15 ft. (4.57 m)			11,212 (5086)	11,212 (5086)	9,795 (4443)	9,795 (4443)	9,278 (4208)	7,199 (3265)
10 ft. (3.05 m)			15,341 (6959)	15,341 (6959)	11,500 (5216)	10,132 (4596)	9,847 (4467)	7,008 (3179)
5 ft. (1.52 m)					13,340 (6051)	9,589 (4349)	10,677 (4843)	6,755 (3064)
Ground Line			20,586 (9338)	14,165 (6425)	14,533 (6592)	9,216 (4180)	10,682 (4845)	6,557 (2974)
-5 ft. (-1.52 m)			20,010 (9076)	14,109 (6400)	14,669 (6654)	9,073 (4115)	10,607 (4811)	6,488 (2943)
-10 ft. (-3.05 m)	20,215 (9169)	20,215 (9169)	18,022 (8175)	14,284 (6479)	13,444 (6098)	9,153 (4152)		
-15 ft. (-4.57 m)	17,763 (8057)	17,763 (8057)	13,813 (6265)	13,813 (6265)				
<i>200LC-3 with 9-ft. 7-in. (2.91 m) arm and 24-in. (600 mm) triple semi-grouser shoes</i>								
20 ft. (6.10 m)					8,048 (3651)	8,048 (3651)		
15 ft. (4.57 m)					8,970 (4069)	8,970 (4069)	8,574 (3889)	7,158 (3247)
10 ft. (3.05 m)			13,847 (6281)	13,847 (6281)	10,757 (4879)	10,049 (4558)	9,329 (4232)	6,922 (3140)
5 ft. (1.52 m)			18,108 (8214)	14,549 (6599)	12,766 (5791)	9,454 (4288)	10,309 (4676)	6,632 (3008)
Ground Line			20,308 (9212)	13,829 (6273)	14,248 (6463)	9,007 (4086)	10,390 (4713)	6,389 (2898)
-5 ft. (-1.52 m)	14,425 (6543)	14,425 (6543)	20,412 (9259)	13,633 (6184)	14,529 (6590)	8,789 (3987)	10,251 (4650)	6,263 (2841)
-10 ft. (-3.05 m)	23,940 (10 859)	23,940 (10 859)	18,971 (8605)	13,728 (6227)	14,028 (6363)	8,795 (3989)	10,316 (4679)	6,321 (2867)
-15 ft. (-4.57 m)	20,943 (9500)	20,943 (9500)	15,628 (7089)	14,083 (6388)	11,249 (5102)	9,073 (4115)		
<i>200LC-3 with 9-ft. 7-in. (2.91 m) arm and 28-in. (700 mm) triple semi-grouser shoes</i>								
20 ft. (6.10 m)					8,048 (3651)	8,048 (3651)		
15 ft. (4.57 m)					8,970 (4069)	8,970 (4069)	8,574 (3889)	7,288 (3306)
10 ft. (3.05 m)			13,847 (6281)	13,847 (6281)	10,757 (4879)	10,221 (4636)	9,329 (4232)	7,052 (3199)
5 ft. (1.52 m)			18,108 (8214)	14,799 (6713)	12,766 (5791)	9,625 (4366)	10,309 (4676)	6,762 (3067)
Ground Line			20,308 (9212)	14,079 (6386)	14,248 (6463)	9,178 (4163)	10,593 (4805)	6,519 (2957)
-5 ft. (-1.52 m)	14,425 (6543)	14,425 (6543)	20,412 (9259)	13,883 (6297)	14,751 (6691)	8,960 (4064)	10,455 (4742)	6,393 (2900)
-10 ft. (-3.05 m)	23,940 (10 859)	23,940 (10 859)	18,971 (8605)	13,978 (6340)	14,028 (6363)	8,966 (4067)	10,316 (4679)	6,451 (2926)
-15 ft. (-4.57 m)	20,943 (9500)	20,943 (9500)	15,628 (7089)	14,334 (6502)	11,249 (5102)	9,244 (4193)		
<i>200LC-3 with 9-ft. 7-in. (2.91 m) arm and 32-in. (800 mm) triple semi-grouser shoes</i>								
20 ft. (6.10 m)					8,048 (3651)	8,048 (3651)		
15 ft. (4.57 m)					8,970 (4069)	8,970 (4069)	8,574 (3889)	7,389 (3352)
10 ft. (3.05 m)			13,847 (6281)	13,847 (6281)	10,757 (4879)	10,353 (4696)	9,329 (4232)	7,152 (3244)
5 ft. (1.52 m)			18,108 (8214)	14,992 (6800)	12,766 (5791)	9,758 (4426)	10,309 (4676)	6,862 (3113)
Ground Line			20,308 (9212)	14,272 (6474)	14,248 (6463)	9,310 (4223)	10,750 (4876)	6,619 (3002)
-5 ft. (-1.52 m)	14,425 (6543)	14,425 (6543)	20,412 (9259)	14,076 (6385)	14,751 (6691)	9,092 (4124)	10,612 (4814)	6,493 (2945)
-10 ft. (-3.05 m)	23,940 (10 859)	23,940 (10 859)	18,971 (8605)	14,171 (6428)	14,028 (6363)	9,098 (4127)	10,316 (4679)	6,552 (2972)
-15 ft. (-4.57 m)	20,943 (9500)	20,943 (9500)	15,628 (7089)	14,527 (6589)	11,249 (5102)	9,376 (4253)		

Buckets

A full line of buckets is offered to meet a wide variety of applications. Digging forces are with power boost. Replaceable cutting edges are available through Hitachi parts. Optional side cutters add 6 inches (150 mm) to bucket widths. Capacities are SAE heaped ratings.

Type Bucket	Bucket Width		Bucket Capacity*		Weight		Bucket Dig Force		Arm Dig Force 7 ft. 11 in. (2.42 m)		Arm Dig Force 9 ft. 7 in. (2.91 m)		Bucket Tip Radius		No. Teeth
	in.	mm	cu. yd.	m ³	lb.	kg	lb.	kN	lb.	kN	lb.	kN	in.	mm	
General-Purpose High Capacity	30	760	0.79	0.60	1,432	650	28,904	128.6	27,806	123.7	22,873	101.7	58.00	1473	4
	36	915	1.00	0.76	1,621	736	28,904	128.6	27,806	123.7	22,873	101.7	58.00	1473	5
	42	1065	1.22	0.93	1,790	813	28,904	128.6	27,806	123.7	22,873	101.7	58.00	1473	5
	48	1220	1.43	1.09	1,976	897	28,904	128.6	27,806	123.7	22,873	101.7	58.00	1473	6
Heavy Duty	24	610	0.52	0.40	1,197	543	29,099	129.4	27,877	124.0	22,924	102.0	57.61	1463	4
	30	760	0.71	0.54	1,369	622	29,099	129.4	27,877	124.0	22,924	102.0	57.61	1463	4
	36	915	0.90	0.69	1,559	708	29,099	129.4	27,877	124.0	22,924	102.0	57.61	1463	5
	42	1065	1.09	0.83	1,731	786	29,099	129.4	27,877	124.0	22,924	102.0	57.61	1463	5
	48	1220	1.29	0.99	1,921	872	29,099	129.4	27,877	124.0	22,924	102.0	57.61	1463	6
Heavy-Duty High Capacity	24	610	0.56	0.43	1,424	646	28,904	128.6	27,806	123.7	22,873	101.7	58.00	1473	4
	30	760	0.76	0.58	1,593	723	28,904	128.6	27,806	123.7	22,873	101.7	58.00	1473	4
	36	915	0.97	0.74	1,782	809	28,904	128.6	27,806	123.7	22,873	101.7	58.00	1473	5
	42	1065	1.19	0.91	1,951	886	28,904	128.6	27,806	123.7	22,873	101.7	58.00	1473	5
Ditching	60	1524	1.14	0.87	1,271	577	40,279	179.2	31,133	138.5	25,271	112.4	41.62	1057	0

Bucket Selection Guide*

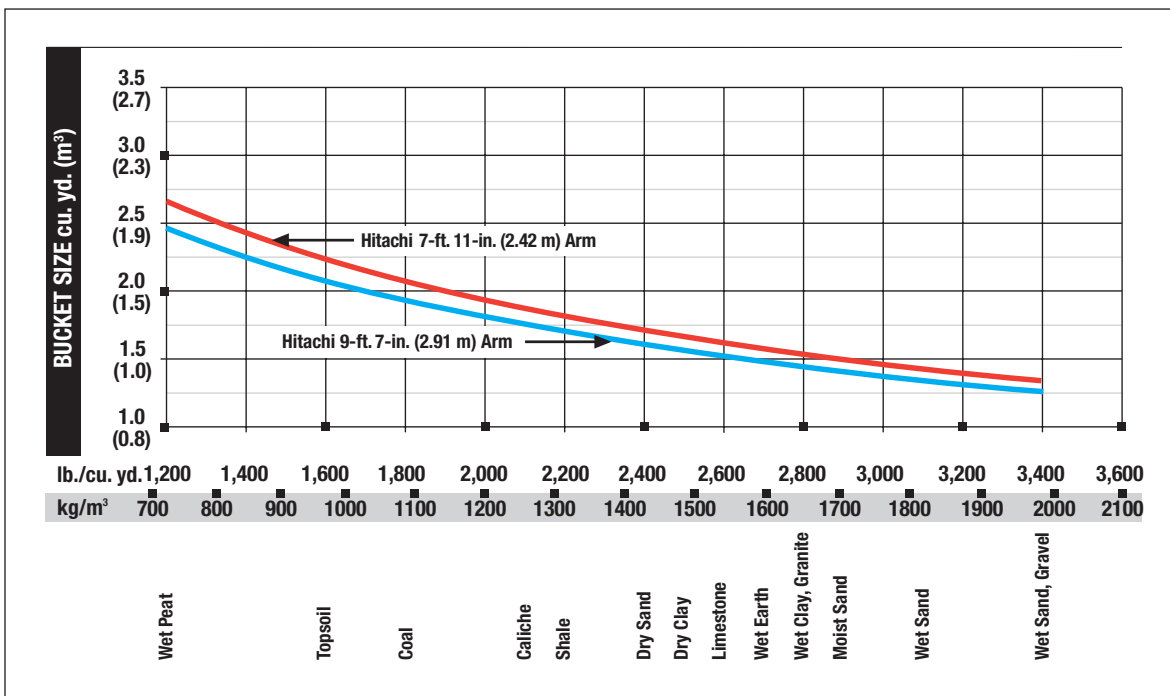

*Contact your Hitachi dealer for optimum bucket and attachment selections. These recommendations are for general conditions and average use. Does not include optional equipment such as thumbs or couplers. Larger buckets may be possible when using light materials, for flat and level operations, less compacted materials, and volume loading applications such as mass excavation applications in ideal conditions. Smaller buckets are recommended for adverse conditions such as off-level applications, rocks, and uneven surfaces. Bucket capacity indicated is SAE heaped.

Equipment

Key ● Standard Equipment ▲ Optional or Special Equipment

Engine

- Certified to EPA Tier-3 emissions
- H/P mode control
- E mode control
- 50 A alternator
- Dry-type air filter with evacuator valve (with air filter restriction switch for monitor)
- Cartridge-type engine oil filter
- Cartridge-type fuel double filters
- Air cleaner double filters
- Radiator, oil cooler and intercooler with dust protective net
- Radiator reserve tank
- Fan guard
- Isolation-mounted engine
- Auto-idle system
- Fuel cooler
- Glow-plug start aid
- Engine oil drain coupler

Hydraulic System

- Reduced-drift valve for boom down, arm in
- Auxiliary hydraulic valve section
- Spring-applied, hydraulically released automatic swing brake
- Auxiliary hydraulic-flow adjustments through monitor
- Auto power lift
- 5,000-hour hydraulic-oil-change interval
- Hydraulic-oil-sampling valve
- ▲ Auxiliary hydraulic lines
- ▲ Auxiliary pilot and electric controls
- ▲ Hydraulic filter restriction indicator kit
- ▲ Load-lowering control device
- ▲ Single-pedal propel control
- ▲ Control pattern change valve

Undercarriage

- Planetary drive with axial piston motors
- Propel motor shields
- Spring-applied, hydraulically released automatic propel brake
- Track guides, front idler and center
- Two-speed propel with automatic shift
- Upper carrier rollers (2)
- Sealed and lubricated track chain
- ▲ Triple semi-grouser shoes, 24 in. (600 mm)
- ▲ Triple semi-grouser shoes, 28 in. (700 mm)
- ▲ Triple semi-grouser shoes, 32 in. (800 mm)

Upperstructure

- Right- and left-hand mirrors
- Vandal locks with ignition key: Cab door / Fuel cap / Service doors / Toolbox
- Remote-mounted engine oil and fuel filters

Front Attachments

- Centralized lubrication system
- Dirt seals on all bucket pins
- Less boom and arm
- HN bushings
- Reinforced resin thrust plates
- Tungsten carbide thermal coating on arm-to-bucket joint
- ▲ Arm, 7 ft. 11 in. (2.42 m)
- ▲ Arm, 9 ft. 7 in. (2.91 m)
- ▲ Attachment quick-couplers
- ▲ Boom cylinder with plumbing to mainframe for less boom and arm
- ▲ Buckets: Ditching / Heavy duty / Heavy-duty high capacity / Side cutters and teeth
- ▲ Material clamps
- ▲ Super-long fronts

Operator's Station

- Adjustable independent control positions (levers-to-seat, seat-to-pedals)
- AM/FM radio
- Auto climate control/air conditioner, 20,000 Btu/hr. (5.9 kW) with heater and pressurizer
- Built-in Operator's Manual storage compartment and manual
- Cell-phone power outlet, 12 volt, 60 watt, 5 amp
- Coat hook
- Deluxe suspension cloth seat with 4-in. (100 mm) adjustable armrests
- Floor mat
- Front windshield wiper with intermittent speeds
- Gauges (illuminated): Engine coolant / Fuel
- Horn, electric
- Hourmeter, electric
- Hydraulic shutoff lever, all controls
- Hydraulic warm-up control
- Interior light
- Large cup holder
- Machine Information Center (MIC)
- Mode selectors (illuminated): Power modes – three / Travel modes – two with automatic shift / Work mode – one

Operator's Station (continued)

- Multifunction, color LCD monitor with: Diagnostic capability / Multiple-language capabilities / Maintenance tracking / Clock / System monitoring with alarm features: Auto-idle indicator, engine air cleaner restriction indicator light, engine check, engine coolant temperature indicator light with audible alarm, engine oil pressure indicator light with audible alarm, low-alternator-charge indicator light, low-fuel indicator light, fault code alert indicator, fuel-rate display, wiper-mode indicator, work-lights-on indicator, and work-mode indicator
- ▲ Monitor system with alarm features: Hydraulic oil filter restriction indicator light
- Motion alarm with cancel switch (conforms to SAE J994)
- Power-boost switch on right console lever
- Auxiliary hydraulic control switches in right console lever
- SAE two-lever control pattern
- Seat belt, 2 in. (51 mm), retractable
- ▲ Seat belt, 3 in. (76 mm), non-retractable
- Tinted glass
- Transparent tinted overhead hatch
- Hot/cold beverage compartment
- ▲ Air-suspension heated seat
- ▲ 24- to 12-volt D.C. radio convertors, 10 amp
- ▲ Protection screens for cab front, rear, and side
- ▲ Window vandal protection covers

Electrical

- 50-amp alternator
- Blade-type multi-fused circuits
- Positive terminal battery covers
- ▲ Cab extension wiring harness
- ZXLink™ Ultimate wireless communication system with 3 years of service

Lights

- Work lights: Halogen / One mounted on boom / One mounted on frame

Control Owning and Operating Costs

Customer Personal Service (CPS) is part of Hitachi's proactive, fix-before-fail strategy on machine maintenance that will help control costs, increase profits, and reduce stress. Included in this comprehensive lineup of ongoing programs and services are:

Fluid analysis program – tells you what's going on inside all of your machine's major components so you'll know if there's a problem before you see a decline in performance. Fluid analysis is included in most extended coverage and preventive-maintenance agreements.

Preventive Maintenance (PM) agreements – give you a fixed cost for maintaining a machine for a given period of time. They also help you

avoid downtime by ensuring that critical maintenance work gets done right and on schedule. On-site preventive maintenance service performed where and when you need it helps protect you from the expense of catastrophic failures and lets you avoid waste-disposal hassles.

Extended warranty coverage – gives you a fixed cost for machine repairs for a given period of time so you can effectively manage expenses. Whether you work in a severe-service setting, or you just want to spread the risk of doing business, this is a great way to custom-fit coverage to your operation. Choose from engine, powertrain, powertrain with hydraulics, or full-machine two-year/2,000-hour or three-year/3,000-hour coverage. An extended coverage contract travels well because it's backed by Hitachi and is honored by all Hitachi construction dealers.

What's more, extended coverage is fully transferable at no extra charge, so it adds value at trade-in.

Customer Support Advisors (CSAs) – Hitachi believes the CSA program lends a personal quality to Customer Personal Service (CPS). Certified CSAs have the knowledge and skills for helping make important decisions on machine maintenance and repair. Their mission is to help you implement a plan that's right for your business and take the burden of machine maintenance off your shoulders.

Net engine power is with standard equipment including air cleaner, exhaust system, alternator, and cooling fan at test conditions per ISO9249. No derating is required up to 10,000-ft. (3050 m) altitude. Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with SAE standards. Except where otherwise noted, these specifications are based on units with 9-ft. 7-in. (2.91 m) arms; 42-in. (1065 mm), 1.19-cu. yd. (0.91 m³), 1,951-lb. (886 kg) heavy-duty buckets; 10,463-lb. (4750 kg) counterweights; full fuel tanks; and 175-lb. (79 kg) operators; and a 200LC-3 unit with 32-in. (800 mm) triple semi-grouser shoes.