

**KOBELCO**

**SK210<sub>LC</sub>**



Note: This catalog may contain attachments and optional equipment that are not available in your area. And it may contain photographs of machines with specifications that differ from those of machines sold in your areas. Please consult your nearest KOBELCO distributor for those items you require. Specialist equipment is needed to use this machine in demolition work. Before using it please contact your KOBELCO dealer. Due to our policy of continuous product improvements all designs and specifications are subject to change without advance notice. Copyright by **KOBELCO CONSTRUCTION MACHINERY CO., LTD.** No part of this catalog may be reproduced in any manner without notice.

**KOBELCO CONSTRUCTION MACHINERY U.S.A. INC.**

22350 Merchants Way Katy, TX 77449  
Tel: 281-888-8430 Fax: 281-506-8713  
www.KOBELCO-USA.com

Inquiries To:

**KOBELCO** is the corporate mark used by Kobe Steel on a variety of products and in the names of a number of Kobe Steel Group companies.

**DRIVEN BY  
PASSION**



# Power Meets Efficiency

**19%**  
Higher fuel efficiency  
means  
"Efficiency"

Compared to S-mode on the SK210LC-8

Increase in  
productivity  
means  
"Power"



To urban centers, and to mines around the world. Kobelco's all-out innovation brings you durable earth-friendly construction machinery that's equal to any task, at sites all over the planet. Increased power and even greater fuel economy bring higher efficiency to any project. Kobelco SK210LC machines are also more durable than ever, able to withstand the rigors of the toughest job sites. It all adds up to new levels of value that are a step ahead of the times. While focusing on the global environment of the future, Kobelco offers next-generation productivity to meet the need for lower life cycle costs and exceed the expectations of customers the world over.



# SK210<sub>LC</sub>



# Evolution Continues, with Improved Fuel Efficiency.

**19%**  
Higher fuel efficiency means "Efficiency"

The new arm interflow system more efficiently controls hydraulic fluid flow, and significant reduction of in-line resistance and pressure loss boosts fuel efficiency by about 19%\*. The electronic-control common-rail engine features high-pressure fuel injection and multiple injection with improved precision. It is fitted with an EGR cooler which greatly reduce PM and NOx emissions and meets TIERIII Standards.

\* Compared to S-mode on the SK210LC-8




## In Pursuit of Improved Fuel Efficiency

### Operation Mode

Fuel consumption is lower in H-mode/S-mode/ECO-mode in comparison with the previous model (Generation 8).

■ Compared to previous models

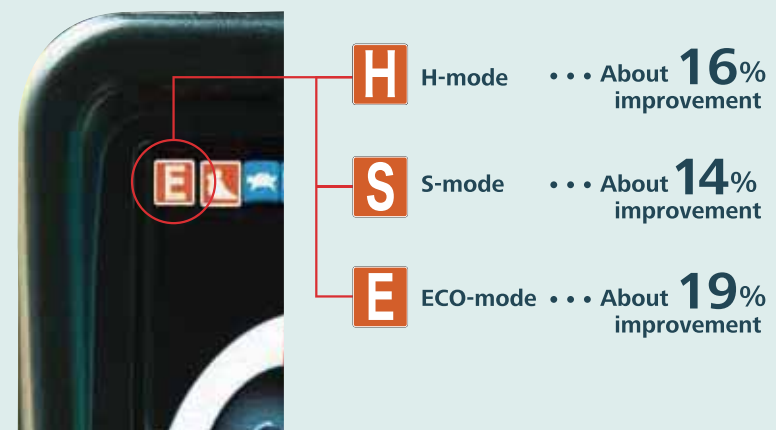

**Always and Forever. Yesterday, Today, and Tomorrow. Obsessed with Fuel Efficiency.**

Over the past 10 years, Kobelco has achieved an average reduction of about 38% in fuel consumption. And we vow to continue to lead in fuel efficiency.


■ Compared to SK210LC-6 model (2006)

**E** ECO-mode (SK210LC-10) ... About **38%** improvement

## Hydraulic System: Revolutionary Technology Saves Fuel


### Arm Interflow System **NEW**

When lowering the boom, this system uses the downward force generated by the boom's weight to push fluid to the shovel arm. This greatly reduces the need to apply power from outside the system.

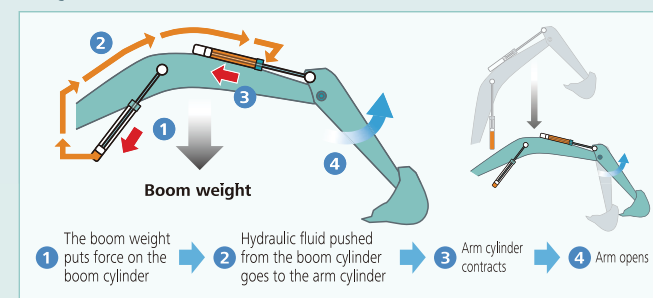

### Hydraulic circuit reduces energy loss


We have made every effort to enhance fuel efficiency by minimizing hydraulic pressure resistance, improving the hydraulic line layout to control friction resistance loss and minimizing valve resistance.

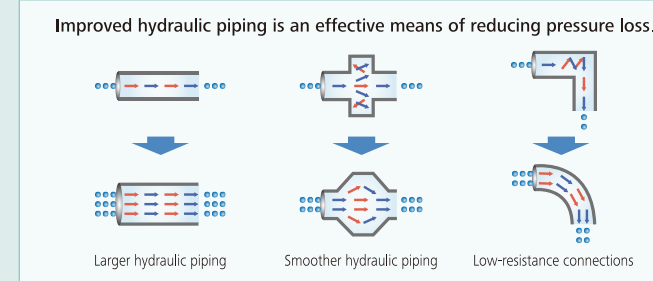

## Pursuing maximum fuel efficiency


### Common rail system

High-pressure injection atomizes the fuel, and more precise injection improves combustion efficiency. This also contributes to better fuel economy.



### EGR cooler

While ensuring sufficient oxygen for combustion, cooled emission gases are mixed with the intake air and recirculated into the engine. This reduces oxygen content and lowers combustion temperature.





# More Power and Higher Efficiency.


The highly efficient hydraulic system minimizes fuel consumption while maximizing power. With nimble movement and ample digging power, this excavator promises to improve your job productivity.

## Superior Digging Force

■ Max. Bucket Digging Force  
Normal: **143kN**  
With power boost: **157kN**

■ Max. Arm Crowding Force  
Normal: **102kN**  
With power boost: **112kN**  
\*Values are for HD arm (2.94m)

## Get More Done Faster with Superior Operability

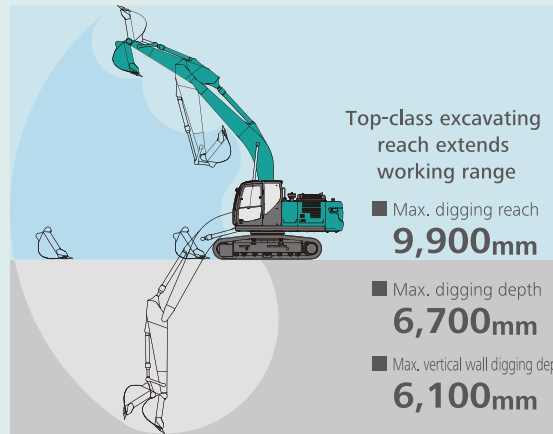

Top-class excavating reach extends working range

- Max. digging reach **9,900mm**
- Max. digging depth **6,700mm**
- Max. vertical wall digging depth **6,100mm**

\*Values are for HD arm (2.94m)


## Heavy Lift

10% more hydraulic pressure (Heavy Lift) means greater lifting power, at close radius, allowing for smooth and steady operation while moving heavy objects.



## Independent Travel

Selecting Independent Travel dedicates one hydraulic pump to travel and one to the attachment on a continuous basis, allowing for a smooth and constant movement speed even while swinging or using the boom or attachment. With Independent Travel, safely carrying a large pipe across a job site is a breeze.



## A Light Touch on the Lever Means Smoother, Less Tiring Work **NEW**



It takes 38% less effort to work the operation lever, which reduces fatigue over long working hours or continued operations.

## Top Class Traveling Force

Powerful traveling force and pulling force deliver plenty of speed when climbing slopes or negotiating bad roads, and the agility to change direction swiftly and smoothly.

■ Drawbar Pulling Force: **227kN**



## Operator-friendly Features Include Controls that Are Easy to See, Easy to Use




## Multi-Display in Color

Brilliant colors and graphic displays are easy to recognize on the LCD multi-display in the console. The display shows fuel consumption, maintenance intervals, and more.

- 1 Analog gauge provides an intuitive reading of fuel level and engine water temperature
- 2 Green indicator light shows low fuel consumption during operation
- 3 Fuel consumption
- 4 Digging mode switch
- 5 Monitor display switch

## One-Touch Attachment Mode Switch

A simple flick of a switch converts the hydraulic circuit and flow amount to match attachment changes. Icons help the operator to confirm the proper configuration at a glance.

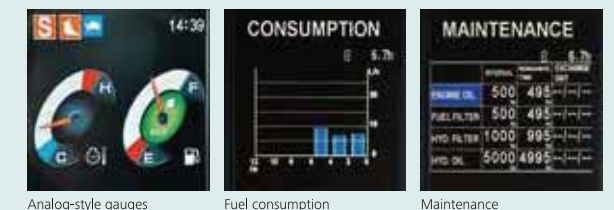

Analog-style gauges Fuel consumption Maintenance



Breaker mode Nibbler mode




Independent Travel mode Heavy Lift



# Increased Power, with Enhanced Durability to Maintain the Machine's Value

Increase in  
productivity  
means  
"Power"

Structural design increases strength,  
while eliminating hydraulic problems.  
Enhanced durability takes  
productivity to a new level.

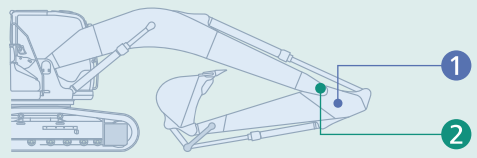

## Built to Operate in Tough Working Environments

The attachment has been reinforced to handle a higher work volume, with greater power and excellent durability that can withstand demanding work conditions.

**1 Enlarged Reinforcement of the Arm Foot**

NEW

HD: Base plate thickness has been increased 1.3 times (20 t).

**2 Modified Foot Boss Shape**

NEW

The arm foot boss shape has been modified and improved to distribute stress, delivering 2.6 times more strength for tasks like digging next to a wall.

## Improved Filtration System Reliability

Clean, contaminant-free fuel and hydraulic fluid are essential to stable performance. The improved filtration systems reduce the risk of mechanical trouble and enhance longevity and durability.

**Hydraulic Fluid Filter**

NEW

Recognized as the best in the industry, our super-fine filter separates out even the smallest particles. New cover prevents contamination when changing filters.

**Hydraulic Fluid Filter Clog Detector**

NEW

Pressure sensors at the inlet and outlet of the hydraulic fluid filter monitor differences in pressure to determine the degree of clogging. If the difference in pressure exceeds a predetermined level, a warning appears on the multi-display, so any contamination can be removed from the filter before it reaches the hydraulic fluid reservoir.



**Metal mesh cover air cleaner**

NEW

Metal mesh cover ensures strength and durability.

**Fuel filter**

The pre-filter with built-in water-separator has 1.6 times more filter area compared to the previous models, with a new final stage to maximize filtering performance.

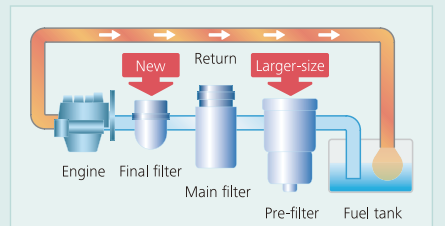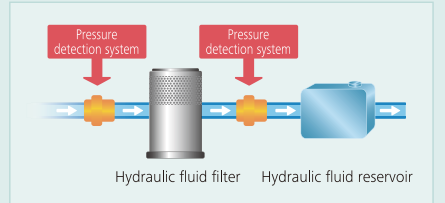



# Comfortable Cab Is Now Safer than Ever.

A work environment that is quieter and more comfortable. A cab that puts the operator first is key to improved safety.



## Comfort

### Super-Airtight Cab



The high level of air-tightness keeps dust out of the cab.

### Quiet Inside

The high level of air-tightness ensures a quiet, comfortable cabin interior.

### Low Vibration

Coil springs absorb small vibrations, and high suspension mounts filled with silicone oil reduce heavy vibration. The long stroke achieved by this system provides excellent protection from vibration.

Twice the stroke of a conventional mount



### Air Conditioner Register behind the Seat NEW



The large air-conditioner has registers on the back pillars that blow from behind and to the right and left of the operator's seat. They can be adjusted to put a direct flow of cool/warm air on the operator, which means a more comfortable operating environment.

### More Comfortable Seat Means Higher Productivity



Seat suspension absorbs vibration



Seat recliner can be pushed back flat



Double slides allow adjustment for optimum comfort

### Interior Equipment Adds to Comfort and Convenience



Automatic AM/FM radio



USB pin/12V power outlet



Spacious storage tray



Large cup holder



### Large Cab Is Easy to Get in and out of

The expanded cab provides plenty of room for a large door, more headroom and smoother entry and exit.

## Safety

### ROPS Cab

ROPS (Roll-Over-Protective Structure)-compliant cab clears ISO standards (ISO-12117-2: 2008) and ensures greater safety for the operator should the machine tip over.

- TOP Guard is fitted as optional.



### Expanded Field of View for Greater Safety



Rearview mirrors left and right



Hammer for emergency exit

Greater safety assured by rearview mirrors on left and right.



Standard rear swing flashers and rear work lights.

### Broad View Liberates the Operator

The front window features one large piece of glass without a center pillar on the right side for a wide, unobstructed view.






### Direct Access to Operational Status

#### Location Data

• Accurate location data can be obtained even from sites where communications are difficult.

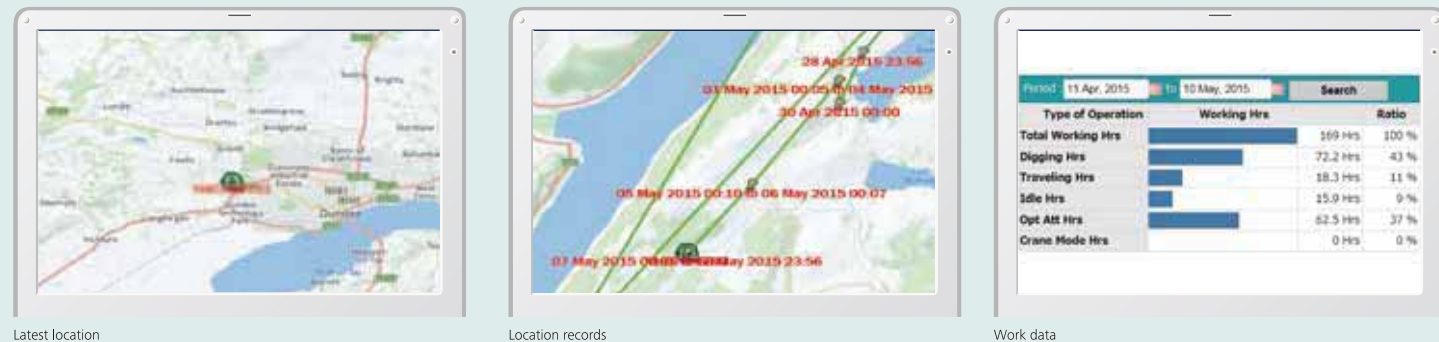


Latest location

Location records

Work data

#### Operating Hours

- A comparison of operating times of machines at multiple locations shows which locations are busier and more profitable.
- Operating hours on site can be accurately recorded, for running time calculations needed for rental machines, etc.

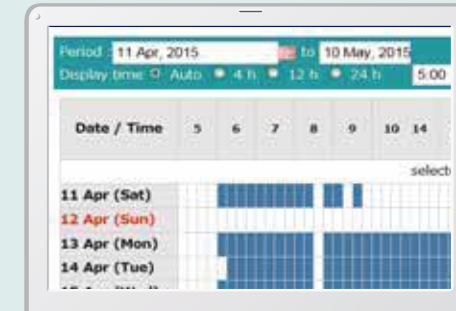

Daily report

#### Fuel Consumption Data

- Data on fuel consumption and idling times can be used to indicate improvements in fuel consumption.

Work mode	Working Hrs	Total Fuel Consumption
H mode	2:06	24.5 L
S mode	0:00	0.0 L
E mode	169:19	1489.7 L
<b>TOTAL</b>	<b>171:25</b>	<b>1514.2 L</b>

Fuel consumption

#### Graph of Work Content

- The graph shows how working hours are divided among different operating categories, including digging, idling, traveling and optional operations.



Work status

### Maintenance Data and Warning Alerts

#### Machine Maintenance Data

- Provides maintenance status of separate machines operating at multiple sites.
- Maintenance data is also relayed to KOBELCO service personnel, for more efficient planning of periodic servicing.

Model	Serial No.	Hour Meter	Engine Oil
SK135SRLC-3/SK140SRL	0.38/0.35	734 Hr	434
SK135SRLC-3/SK140SRL	0.38/0.35	73 Hr	429
SK210LC-9	0.8/0.7	960 Hr	58
SK210LC-9	0.8/0.7	549 Hr	498
SK75SR-	0.8/0.7		

Maintenance

#### Warning Alerts

- This system warns an alert if an anomaly is sensed, preventing damage that could result in machine downtime.

#### Alarm Information Can Be Received through E-mail

- Alarm information or maintenance notice can be received through E-mail, using a computer or cell phone.




#### Daily/Monthly Reports

- Operational data downloaded onto a computer helps in formulating daily and monthly reports.

### Security System

#### Engine Start Alarm

- The system can be set an alarm if the machine is operated outside designated time.

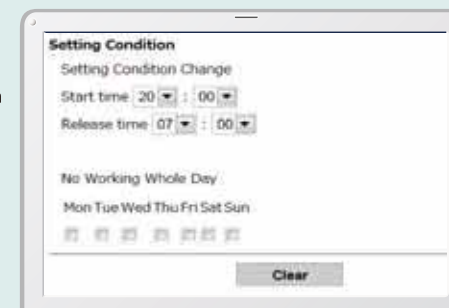

Engine start alarm outside prescribed work time

#### Area Alarm

- It can be set an alarm if the machine is moved out of its designated area to another location.



Alarm for outside of reset area



# Efficient Maintenance Keeps the Machine in Peak Operating Condition.



MAINTENANCE			
	INTERVAL	REMAINING TIME	EXCHANGE DAY
ENGINE OIL	500 hr	495 hr	--/--/--
FUEL FILTER	500 hr	495 hr	--/--/--
HYD. FILTER	1000 hr	995 hr	--/--/--
HYD. OIL	5000 hr	4995 hr	--/--/--

## Machine Information Display Function

Examples of displaying maintenance information

- Displays only the maintenance information that's needed, when it's needed
- Self-diagnostic function provides early-warning detection and display of electrical system malfunctions
- Service-diagnostic function makes it easier to check the status of the machine
- Record function of previous breakdowns including irregular and transient malfunction

## Easy, On-the-Spot Maintenance NEW

There is ample space in the engine compartment for a mechanic to do maintenance work inside. The distance between steps is lower so entry and exit is easier. And the mechanic can work in comfort, without contortions or unnatural body positions. Finally, the hood is lighter and easier to raise and lower.



Generous space for maintenance work



Step/Hand rail

## Maintenance Work, Daily Checks, Etc., Can Be Done from Ground Level

The layout allows for easy access from the ground for many daily checks and regular maintenance tasks.



Double-element air cleaner



Fuel filter with built-in water-separator



Engine oil filter



Right side



Left side


- 1 Fuel filter
- 2 Pre-fuel filter with built-in water-separator
- 3 Engine oil filter

Laid out for easy access to radiator and cooling system elements

## More Efficient Maintenance Inside the Cab



Easy-access fuse box

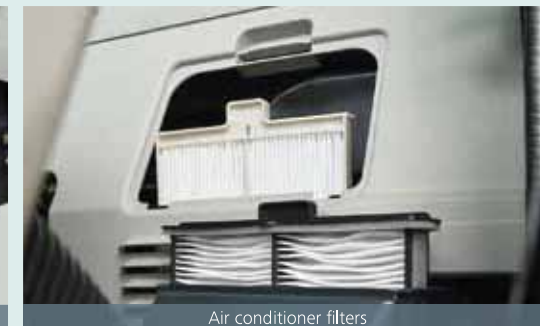

Air conditioner filters

More finely differentiated fuses make it easier to locate malfunctions.

Internal and external air conditioner filters can be easily removed without tools for cleaning.

## Easy Cleaning



Crawler frame



Detachable two-piece floor mat



Engine oil pan

Special crawler frame design is easily cleaned of mud.

Detachable two-piece floor mat with handles for easy removal. A floor drain is located under floor mat.

Engine oil pan equipped with drain valve.

## Highly Durable Super-fine Filter

The high-capacity hydraulic oil filter incorporates glass fiber with superior cleaning power and durability.

Replacement cycle:  
**1,000**  
hours



KOBELCO





## Engine

Model	JO5ETA-KSSE
Type	Direct injection, water-cooled, 4-cycle diesel engine with turbocharger, intercooler
No. of cylinders	4
Bore and stroke	112 mm x 130 mm
Displacement	5.123 L
Rated power output	114 kW/2,000 min <sup>-1</sup> (ISO 9249) 118 kW/2,000 min <sup>-1</sup> (ISO 14396)
Max. torque	569 N·m/1,600 min <sup>-1</sup> (ISO 9249) 592 N·m/1,600 min <sup>-1</sup> (ISO 14396)



## Hydraulic System

Pump	
Type	Two variable displacement pumps + one gear pump
Max. discharge flow	2 x 220 L/min, 1 x 20 L/min
Relief valve setting	
Boom, arm and bucket	34.3 MPa {350 kgf/cm <sup>2</sup> }
Power Boost	37.8 MPa {385 kgf/cm <sup>2</sup> }
Travel circuit	34.3 MPa {350 kgf/cm <sup>2</sup> }
Swing circuit	29.0 MPa {296 kgf/cm <sup>2</sup> }
Control circuit	5.0 MPa {50 kgf/cm <sup>2</sup> }
Pilot control pump	Gear type
Main control valve	8-spool
Oil cooler	Air cooled type



## Swing System

Swing motor	Axial piston motor
Brake	Hydraulic; locking automatically when the swing control lever is in neutral position
Parking brake	Oil disc brake, hydraulic operated automatically
Swing speed	13.3 min <sup>-1</sup> {rpm}
Swing torque	71.5 kN·m (SAE)
Tail swing radius	2,910 mm
Min. front swing radius	3,550 mm



## Travel System

Travel motors	2 x axial-piston, two-step motors
Travel brakes	Hydraulic brake per motor
Parking brakes	Oil disc brake per motor
Travel shoes	49 each side
Travel speed	6.0/3.6 km/h
Drawbar pulling force	227 kN (ISO 7464)
Gradeability	70 % {35°}



## Cab and Control

Cab	
All-weather, sound-suppressed steel cab mounted on the high suspension mounts filled with silicone oil and equipped with a heavy, insulated floor mat.	
Control	
Two hand levers and two foot pedals for travel	
Two hand levers for excavating and swing	
Electric rotary-type engine throttle	



## Boom, Arm and Bucket

Boom cylinders	120 mm x 1,355 mm
Arm cylinder	135 mm x 1,558 mm
Bucket cylinder	120 mm x 1,080 mm



## Refilling Capacities and Lubrications

Fuel tank	320 L
Cooling system	18 L
Engine oil	20.5 L
Travel reduction gear	2 x 5.3 L
Swing reduction gear	2.7 L
Hydraulic oil tank	140 L tank oil level 244 L hydraulic system



## Working Ranges

Unit: m

Range	Arm	5.65 m		
		Short 2.4 m	Standard 2.94 m	Long 3.5 m
a- Max. digging reach		9.42	9.9	10.34
b- Max. digging reach at ground level		9.24	9.73	10.17
c- Max. digging depth		6.16	6.7	7.26
d- Max. digging height		9.51	9.72	9.75
e- Max. dumping clearance		6.68	6.91	6.97
f- Min. dumping clearance		2.98	2.43	1.87
g- Max. vertical wall digging depth		5.57	6.1	6.47
h- Min. swing radius		3.56	3.55	3.48
i- Horizontal digging stroke at ground level		4.08	5.27	6.08
j- Digging depth for 2.4 m (8') flat bottom		5.95	6.52	7.08

### Digging Force (ISO 6015)

Unit: kN

Arm length	Short 2.4 m	Standard 2.94 m	Long 3.5 m
Bucket digging force	143 157*	143 157*	143 157*
Arm crowding force	121 133*	102 112*	91.8 101*

\*Power Boost engaged.




## Dimensions

Arm length	Short 2.4 m	Standard 2.94 m	Long 3.5 m
A Overall length	9,680	9,600	9,670
B Overall height (to top of boom)	3,200	2,980	3,200
C Overall width of crawler	2,990		
D Overall height (to top of cab)	3,010		
E Ground clearance of rear end*	1,060		
F Ground clearance*	450		

		Unit: mm
G	Tail swing radius	2,910
G'	Distance from center of swing to rear end	2,900
H	Tumbler distance	3,660
I	Overall length of crawler	4,450
J	Track gauge	2,390
K	Shoe width	600
L	Overall width of upperstructure	2,710

\*Without including height of shoe


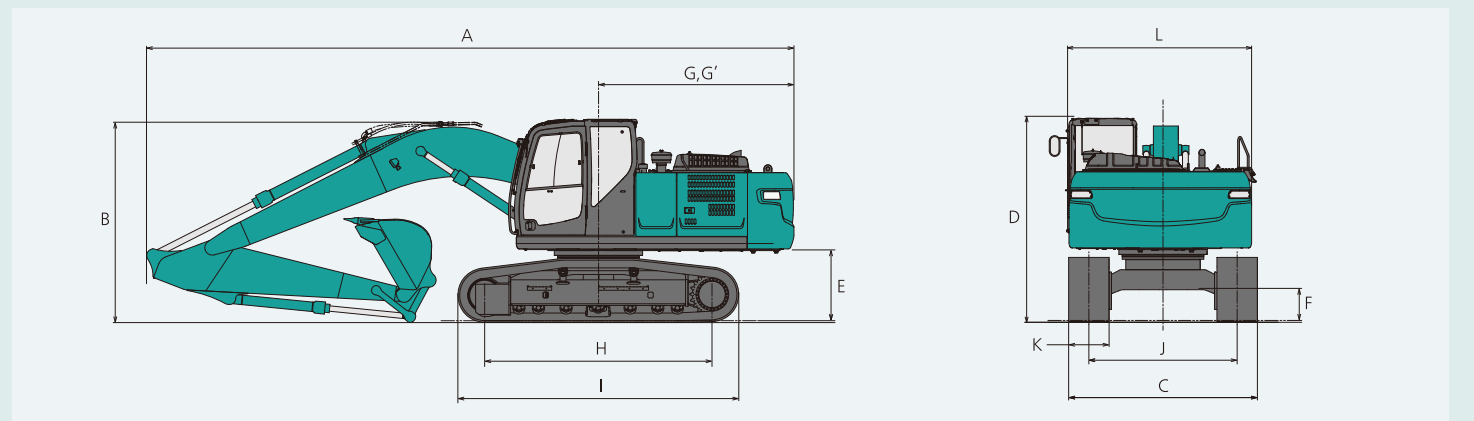


## Operating Weight and Ground Pressure

In standard trim, with standard boom, 2.94 m arm, and 0.8 m<sup>3</sup> ISO heaped bucket

Type	Triple grouser shoes (even height)				
Shoe width	mm	600	700	800	900
Overall width of crawler	mm	2,990	3,090	3,180	3,290
Ground pressure	kPa	44	38	34	31
Operating weight	kg	21,100	21,500	21,800	22,100





A: Reach from swing centerline to arm top  
 B: Arm top height above/below ground  
 C: Lifting capacities in Kilograms  
 Bucket: Without bucket  
 Relief valve setting: 37.8 MPa (385 kgf/cm<sup>2</sup>)

SK210LC		Boom: 5.65 m Arm: 2.94 m, Bucket: without Shoe: 600 mm											HEAVY LIFT	
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At Max. Reach		Radius
		Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	
7.5 m	kg											*4,290	*4,290	6.26 m
6.0 m	kg											*3,970	3,670	7.36 m
4.5 m	kg											*3,880	3,120	8.03 m
3.0 m	kg					*9,420	7,330	*7,330	4,770	5,300	3,400	*3,960	2,830	8.38 m
1.5 m	kg					*11,110	6,760	7,230	4,500	5,150	3,270	*4,190	2,730	8.45 m
G.L.	kg			*6,360	*6,360	11,120	6,460	7,020	4,310	5,050	3,170	4,400	2,780	8.25 m
-1.5 m	kg	*6,720	*6,720	*11,080	*11,080	11,020	6,370	6,930	4,240	5,020	3,150	4,800	3,020	7.75 m
-3.0 m	kg	*11,750	*11,750	*14,740	12,590	*10,620	6,450	6,980	4,280			5,740	3,590	6.89 m
-4.5 m	kg			*10,940	*10,940	*8,020	6,700					*6,030	5,070	5.50 m

SK210LC		Boom: 5.65 m Arm: 3.5 m, Bucket: without Shoe: 600 mm											HEAVY LIFT	
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At Max. Reach		Radius
		Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	
7.5 m	kg											*3,670	*3,670	6.84 m
6.0 m	kg									*4,570	3,620	*3,460	3,310	7.86 m
4.5 m	kg							*5,890	5,120	5,470	3,540	*3,430	2,840	8.49 m
3.0 m	kg			*12,940	*12,940	*8,540	7,500	*6,810	4,820	5,310	3,400	*3,520	2,590	8.82 m
1.5 m	kg			*7,260	*7,260	*10,450	6,850	7,260	4,520	5,140	3,250	*3,740	2,490	8.89 m
G.L.	kg			*7,750	*7,750	11,130	6,450	7,000	4,290	5,000	3,120	4,020	2,520	8.70 m
-1.5 m	kg	*6,590	*6,590	*10,980	*10,980	10,930	6,280	6,860	4,160	4,930	3,060	4,330	2,700	8.22 m
-3.0 m	kg	*10,510	*10,510	*15,920	12,310	10,950	6,300	6,860	4,160			5,040	3,140	7.42 m
-4.5 m	kg	*15,600	*15,600	*12,780	12,680	*9,160	6,480	*6,470	4,320			*6,160	4,180	6.16 m

SK210LC		Boom: 5.65 m Arm: 2.4 m, Bucket: without Shoe: 600 mm											HEAVY LIFT	
B	A	3.0 m		4.5 m		6.0 m		7.5 m		At Max. Reach		Radius		
		Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees			
7.5 m	kg											*6,340	5,760	5.58 m
6.0 m	kg					*6,510	5,140					*5,770	4,140	6.80 m
4.5 m	kg			*8,310	7,770	*6,970	4,970	5,360	3,460	5,330	3,440	5,330	3,440	7.52 m
3.0 m	kg			*10,150	7,140	7,460	4,710	5,270	3,370	4,850	3,100	4,850	3,100	7.89 m
1.5 m	kg			11,350	6,650	7,190	4,470	5,150	3,260	4,700	2,990	4,700	2,990	7.97 m
G.L.	kg			11,090	6,440	7,020	4,320	5,070	3,200	4,840	3,060	4,840	3,060	7.75 m
-1.5 m	kg	*11,450	*11,450	11,070	6,420	6,980	4,280					5,370	3,380	7.22 m
-3.0 m	kg	*13,220	12,810	*9,930	6,550	7,100	4,390					*6,630	4,150	6.29 m
-4.5 m	kg			*6,270	*6,270							*5,740	*5,740	4.72 m

- Notes:**
- Do not attempt to lift or hold any load that is greater than these lift capacities at their specified lift point radius and heights. Weight of all accessories must be deducted from the above lift capacities.
  - Lift capacities are based on machine standing on level, firm, and uniform ground. User must make allowance for job conditions such as soft or uneven ground, out of level conditions, side loads, sudden stopping of loads, hazardous conditions, experience of personnel, etc.
  - Arm top defined as lift point.
  - The above lifting capacities are in compliance with ISO 10567. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Lifting capacities marked with an asterisk (\*) are limited by hydraulic capacity rather than tipping load.
  - Operator should be fully acquainted with the Operator's and Maintenance Instructions before operating this machine. Rules for safe operation of equipment should be adhered to at all times.
  - Lift capacities apply to only machine as originally manufactured and normally equipped by KOBELCO CONSTRUCTION MACHINERY CO., LTD.

## STANDARD EQUIPMENT

### ENGINE

- Engine, HINO J05ETA-KSSE, diesel engine with turbocharger and intercooler
- Automatic engine deceleration
- Auto Idle Stop (AIS)
- Batteries (2 x 12V - 96Ah)
- Starting motor (24V - 5 kW), 60 amp alternator
- Engine oil pan drain cock
- Double element air cleaner
- Dustproof cap

### CONTROL

- Working mode selector (H-mode, S-mode and ECO-mode)
- Heavy Lift and Power Boost "without time limit"

### SWING SYSTEM and TRAVEL SYSTEM

- Swing rebound prevention system
- Straight propel system
- Independent travel system
- Two-speed travel with automatic shift down
- Sealed and lubricated track links
- Grease-type track adjusters
- Automatic swing brake
- Lower track guards
- Lower under cover

### HYDRAULIC

- Arm regeneration system
- Auto warm up system
- Aluminum hydraulic oil cooler

### MIRRORS and LIGHTS

- Two rear view mirrors
- Three front working lights (2 for boom, one for right storage box)
- Two cab lights
- Swing flashers

### CAB and CONTROL

- ROPS Cab
- Two control levers, pilot-operated
- Tow eyes
- Horn, electric
- Cab light (interior)
- Luggage tray
- Large cup holder
- Detachable two-piece floor mat
- Headrest
- Handrails
- Intermittent windshield wiper with double-spray washer
- Tinted safety glass
- Pull-up type front window and removable lower front window
- Easy-to-read multi-display color monitor
- Automatic air conditioner
- Emergency escape hammer
- Suspension seat
- Radio, AM/FM stereo with speaker
- AUX and USB and Bluetooth
- KOMEXS
- Travel alarm
- Refueling pump

## OPTIONAL EQUIPMENT

- Various optional arms
- Wide range of shoes
- Additional hydraulic circuit
- Rain visor (may interfere with bucket action)
- TOP guard
- Front-guard protective structures

Note: Standard and optional equipment may vary. Consult your KOBELCO dealer for specifics.